

ReTac[®]

Smooth 75

ReTac[®] Smooth 75 is 75 μ (3 mil), printable white polymeric PVC film coated on one side with ReTac[®] ultra removable adhesive. With ReTac[®] adhesive technology, there is no need to worry about surface damage during graphic removal. ReTac[®] Smooth 75 can be removed and repositioned multiple times without a decrease in bond strength. It has a Class 0 fire rating, making it ideal for use on most indoor surfaces and for applications in public areas that require compliance with strict fire regulations, such as airports, hotels and hospitals.

- IDEAL FOR INTERIOR PROMOTIONS
- PERFECT FOR APPLICATIONS IN PUBLIC AREAS THAT REQUIRE COMPLIANCE WITH STRICT FIRE REGULATIONS

3 White
mil Phthalate-Free
Polymeric
PVC  Matte


 (Eco) Solvent
Latex
UV

 ReTac[®] ultra removable
and re-positionable
adhesive

 Widths up to 54 in

 **5** YEARS DURABILITY
INTERIOR AND EXTERIOR
(2 YEAR REMOVABILITY EXTERIOR)

EASY APPLICATION AND REMOVAL

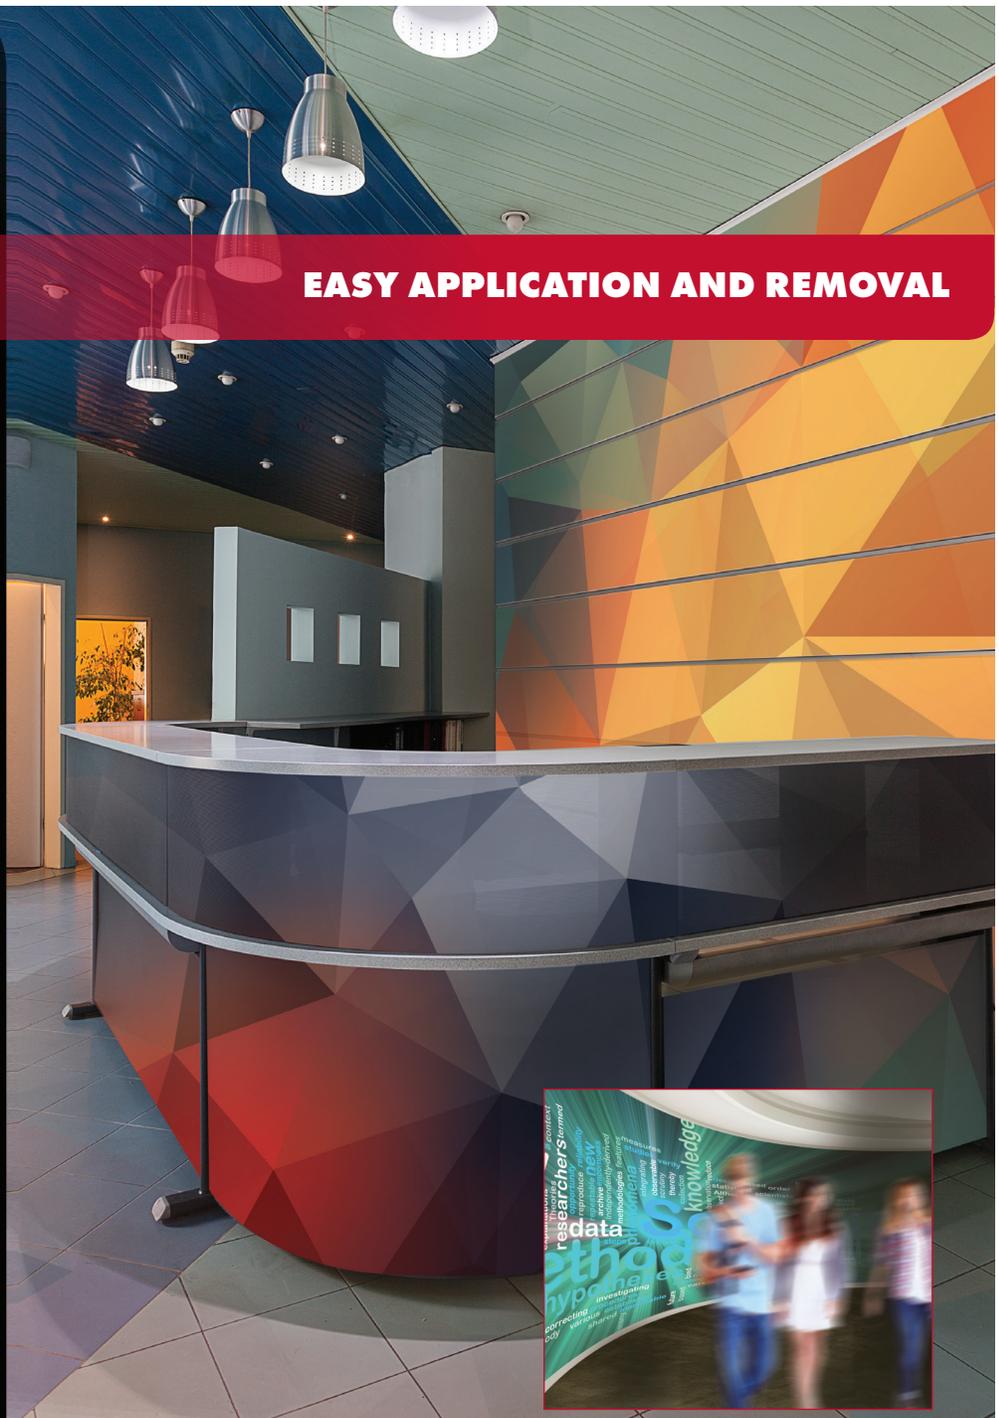

APPLICATIONS

- Smooth Flat Surfaces
- Point Of Sale Graphics
- Interior Décor
- Decals & Stickers

Certified for
HP Latex Inks

DRYTAC[®]
ADHESIVE SCIENCE

www.drytac.com

ReTac®

Smooth 75

ReTac® Smooth 75 is a 75µ (3 mil) printable matte white, phthalate-free polymeric PVC film, coated on one side with ReTac® ultra removable adhesive. The adhesive is protected by a single-sided, siliconised PE coated Kraft release liner. This high quality, ink receptive printable vinyl was specifically developed for easy application and removal of vibrant graphics to a wide range of substrates. ReTac® Smooth 75 can be easily applied, re-positioned and removed without surface damage or loss of adhesion.

- RETAC® IS A PHTHALATE-FREE FILM.
- IDEAL FOR REMOVABLE WALL DECALS, APPLIQUÉS AND WALL MURALS.
- SUITABLE FOR USE ON MOST INDOOR SURFACES, PAINTED WALLS, MELAMINE, AND GLASS.
- RETAC® SMOOTH 75 HAS SEVERAL FIRE RATINGS, MAKING IT PERFECT FOR APPLICATIONS IN PUBLIC AREAS THAT REQUIRE COMPLIANCE WITH STRICT FIRE REGULATIONS, SUCH AS AIRPORTS, HOTELS AND HOSPITALS.

Please Note: Plasticizer migration from some PVC substrates could cause adhesive residue being left behind upon removal, for more information please contact your local representative.

**For more information,
performance and warranty guide
lines please contact your local
Drytac office.**

© 2022 Drytac Corporation. E&OE.
All other trademarks are the property
of their respective owners.

05132022

TECHNICAL SPECIFICATION

PRODUCT STRUCTURE

Film	Matte White Polymeric PVC
Adhesive	ReTac® ultra removable and re-positionable adhesive technology
Release Liner	88# (143gsm) 1 side siliconized PE coated Kraft paper

PRODUCT CHARACTERISTICS

Film Thickness	3 mil (75µ) 3.7 mil (93µ)
Adhesive Layer	0.7 mil (18µ) (93µ)
Outdoor Durability	5 years; 2 years removability
Application Temperature	>41°F (5°C)
Service Temperature Range	40°F to 120°F (4.4°C to 48.9°C)
Flame Ratings	Class 0 (BS 476 - Part 6 & 7) Class C-s1, d0 (EN 13501-1) PASS (CAN/ULC-S102)
Shelf Life	2 years
Storage Conditions	59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity

OVERLAMINATE RECOMMENDATIONS

When using ReTac® Smooth 75, an overlaminate can be used for maximum life expectancy. Products recommended for use with ReTac® Smooth 75 are Drytac's Interlam™ Pro overlaminates.

DRYTAC®

ADHESIVE SCIENCE

Europe

Filwood Road,
Fishponds,
Bristol, BS16 3RY,
United Kingdom
bristol@drytac.com
Tel: +44 (0) 117 958 6500

Canada

30 Driver Road,
Brampton,
Ontario, L6T 5V2,
Canada
toronto@drytac.com
Tel: +1 800.353.2883

USA

5401 B Eubank Road,
Sandston,
Virginia, 23150,
USA
customerservice@drytac.com
Tel: +1 800.280.6013

www.drytac.com