

# ViziPrint®

## Impress White


Our printable window film is designed for trouble-free installation of graphics on glass surfaces. ViziPrint® Impress White utilizes hybrid adhesive technology that creates a strong bond in both high and low temperatures without leaving residue behind. This adhesion technology also eliminates bubbling and is unaffected by moisture. Since it uses a mechanical bond to gently adhere images to windows, the glass stays clear and graphics stay bright whenever ViziPrint® Impress White is re-positioned and re-applied. The film is ideal for high quality decals, signage and retail window advertising.

- IDEAL FOR INTERIOR & SHORT TERM OUTDOOR PROMOTIONS
- EASY TOOL & BUBBLE FREE APPLICATION
- CAN BE REMOVED WITHOUT LEAVING ADHESIVE RESIDUE

**4.6**  
mil

Ultra  
White  
PET

Matte



(Eco) Solvent  
Latex  
UV



Hybrid  
Adhesive  
Technology



Widths up to 54 in

3 YEARS DURABILITY  
INTERIOR


2 YEARS DURABILITY  
EXTERIOR\*

**BEAUTIFULLY DISPLAY VIVID GRAPHICS**



### APPLICATIONS

Smooth Flat Surfaces  
Retail Displays  
Window Graphics  
Decals & Stickers

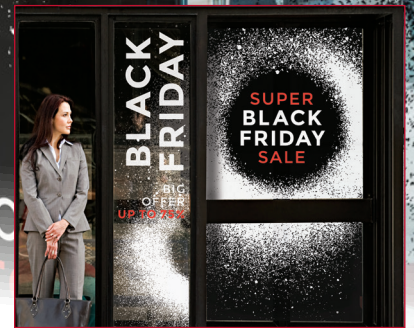

Certified for  
HP Latex Inks

**DRYTAC®**  
ADHESIVE SCIENCE

[www.drytac.com](http://www.drytac.com)

## Impress White

ViziPrint® Impress White is a 4.6 mil (115µ) ultra white PET film with a hybrid adhesive technology that is protected by a clear, 1 side siliconized release liner. Its hybrid adhesive technology creates a strong bond in both high and low temperatures without leaving residue behind, eliminates bubbling and is unaffected by moisture. ViziPrint® Impress White can be re-positioned and re-applied multiple times and removes cleanly up to 3 years after installation.

- IDEAL FOR APPLICATIONS ON GLASS AND OTHER SMOOTH, FLAT SURFACES
- IDEAL FOR INTERIOR & SHORT TERM OUTDOOR PROMOTIONS
- CAN BE USED ON ELECTRONIC EQUIPMENT, SUCH AS TV SCREENS, IPAD/TABLET DISPLAYS AND COMPUTER MONITORS, AS WELL AS REFRIGERATORS, GLASS DISPLAY CASES.

### INSTALLATION

#### RECOMMENDATION

Wet or dry installation will work for ViziPrint® Impress White. Please see ViziPrint® Impress White installation instructions for further details. The surface must be clean and smooth and free of defects before application.

For more information, performance and warranty guidelines please contact your local Drytac office.

© 2022 Drytac Corporation. E&OE.  
All other trademarks are the property of their respective owners.

## TECHNICAL SPECIFICATION

### PRODUCT STRUCTURE

Film	Ultra White PET
Adhesive	Hybrid Adhesive Technology
Release Liner	Siliconized 1 Side PET

### PRODUCT CHARACTERISTIC

Film Thickness	4.6 mil (115µ)
Outdoor Durability	2 Years (ink dependent; see warranty for more details)
Application Temperature	>23°F (-5°C)
Service Temperature Range	-4°F to 248°F (-20°C to 120°C)
Stretching Temperature	140°F - 176°F (60°C - 80°C)
Melting Temperature	498°F (259°C)
Shelf Life	2 years
Storage Conditions	59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity

### PRINTING RECOMMENDATIONS

- Handle material with care prior to printing; use gloves to avoid fingerprints.
- Printing temperature should be 59-86°F (15-30°C) with 30-60% humidity.
- Set printer to highest print setting for optimal print quality.
- If mounting on glass or backlit substrates, evaluate color density of the print on a window or in transmitted light.

**DRYTAC®**  
ADHESIVE SCIENCE

#### Europe

Filwood Road,  
Fishponds,  
Bristol, BS16 3RY,  
United Kingdom  
[bristol@drytac.com](mailto:bristol@drytac.com)  
Tel: +44 (0) 117 958 6500

#### Canada

30 Driver Road,  
Brampton,  
Ontario, L6T 5V2,  
Canada  
[toronto@drytac.com](mailto:toronto@drytac.com)  
Tel: +1 800.353.2883

#### USA

5401 B Eubank Road,  
Sandston,  
Virginia, 23150,  
USA  
[customerservice@drytac.com](mailto:customerservice@drytac.com)  
Tel: +1 800.280.6013