

# Polar®

## Choice White

Polar® Choice White is the ideal choice for a printable monomeric PVC film. Available with a gloss or matte finish and permanent or removable adhesive, Polar® Choice White maximises adhesive performance on a wide variety of substrates.

Polar® Choice White is outdoor durable for up to 5 years and is ideal for signage and general advertising applications, including windows, POP displays, stickers and decals.

- IDEAL FOR INDOOR & OUTDOOR GENERAL SIGNAGE & DISPLAY
- WINDOW & WALL GRAPHICS
- SUITABLE FOR MANY APPLICATIONS

### Product Codes:

CGWG - Polar Choice White Gloss PB

CPWG - Polar Choice White Gloss P

CPWM - Polar Choice White Matte P

CRWM - Polar Choice White Matte RB

**80**  
micron

White  
Monomeric  
PVC

  
Gloss or  
Matte



(Eco)Solvent  
Latex  
UV



Permanent or Removable  
Acrylic Solvent  
Adhesive




Widths up to 1524mm



**5** YEARS DURABILITY  
INTERIOR & EXTERIOR  
(unprinted)

## THE CHOICE FOR MONOMERIC PVC

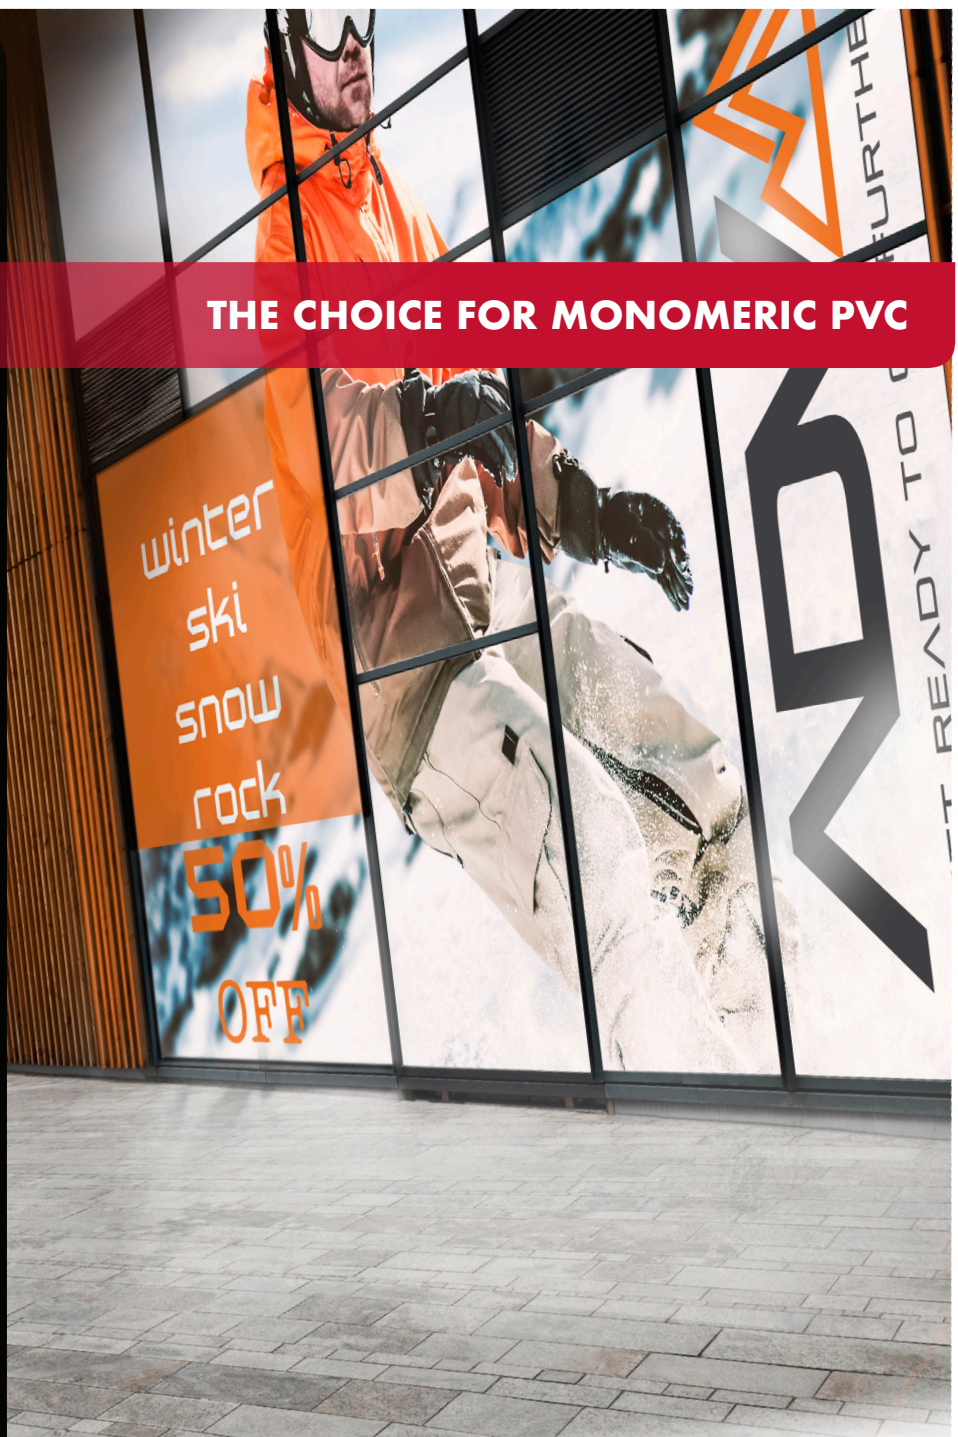

## APPLICATIONS

GENERAL SIGNAGE

WINDOW GRAPHICS

EXHIBITION GRAPHICS

POS DISPLAY



# DRYTAC®

## ADHESIVE SCIENCE

[www.drytac.com](http://www.drytac.com)

# Polar®

## Choice White

Polar® Choice White films are 80µ (3.2 mil) gloss or matte white monomeric PVC films, coated on one side with a permanent or removable, pressure sensitive clear or grey solvent acrylic adhesive that is protected by a 140gsm 2 side PE coated release liner. Suitable for interior and exterior use (up to 5 years).

### CGWG - Polar Choice White Gloss PB

White Gloss film with Permanent Grey Adhesive

### CPWG - Polar Choice White Gloss P

White Gloss film with Permanent Clear Adhesive

### CPWM - Polar Choice White Matte P

White Matte film with Permanent Clear Adhesive

### CRWM - Polar Choice White Matte RB

White Matte film with Removable Grey Adhesive

- IDEAL FOR GENERAL SIGNAGE & GRAPHIC PROMOTIONS
- SUITABLE FOR INTERIOR AND EXTERIOR USE
- CAN BE APPLIED TO MANY SMOOTH SURFACES

#### INSTALLATION RECOMMENDATION

The surface must be clean and smooth and free of defects before application.

For more information, performance and warranty guidelines please contact your local Drytac office.

© 2020 Drytac Corporation. E&OE.  
All other trademarks are the property of their respective owners.

## TECHNICAL SPECIFICATION

### PRODUCT STRUCTURE

<b>Film</b>	White Gloss or Matte Monomeric PVC
<b>Adhesive</b>	Clear or Grey Permanent or Grey Removable Solvent Acrylic (Pressure Sensitive)
<b>Release Liner</b>	140gsm 2 side PE Coated Release Paper

### PRODUCT CHARACTERISTIC

<b>Film Thickness</b>	3.2 mil (80µ)   4.2 mil
<b>Adhesive Layer</b>	1 mil (25µ)   (105µ)
<b>Outdoor Durability</b>	5 Years (Unprinted)
<b>Fire Rating (EN 13501-1)</b>	Class C-s1,d0
<b>Application Temperature</b>	>41°F (5°C)
<b>Service Temperature Range</b>	-4°F to 149°F (-20°C to 65°C)
<b>Shelf Life</b>	2 years
<b>Storage Conditions</b>	59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity

### OVERLAMINATE RECOMMENDATIONS

When using Polar® Choice, an overlaminate can be used for maximum life expectancy. Products recommended for use with Polar® Choice are Drytac's Dynamic™, Interlam™ or Protac™ overlaminates.

# DRYTAC®

## ADHESIVE SCIENCE

#### Europe

Filwood Road,  
Fishponds,  
Bristol, BS16 3RY,  
United Kingdom  
[bristol@drytac.com](mailto:bristol@drytac.com)  
Tel: +44 (0) 117 958 6500

#### Canada

30 Driver Road,  
Brampton,  
Ontario, L6T 5V2,  
Canada  
[toronto@drytac.com](mailto:toronto@drytac.com)  
Tel: +1 800.353.2883

#### USA

5401-B Eubank Road,  
Sandston,  
Virginia, 23150,  
USA  
[customerservice@drytac.com](mailto:customerservice@drytac.com)  
Tel: +1 800.280.6013

[www.drytac.com](http://www.drytac.com)