

CTac™ 80

White PB

CTac™ 80 White PB is a versatile, printable monomeric PVC film designed for reliable performance across a wide range of applications. Available in gloss or matte finishes and coated with a permanent gray adhesive, it delivers strong adhesion on a variety of substrates.

With outdoor durability of up to three years, CTac™ 80 White PB is well suited for signage and general advertising applications, including window graphics, POP displays, stickers, and decals.

- IDEAL FOR INDOOR & OUTDOOR GENERAL SIGNAGE & DISPLAY
- WINDOW & WALL GRAPHICS
- SUITABLE FOR EVERYDAY APPLICATIONS

Product Codes:

CTMPB - CTac 80 White Matte PB

CTGPB - CTac 80 White Gloss PB

3.2
mil

White
Monomeric
PVC

Matte or
Gloss



(Eco) Solvent
Latex
UV



Grey
Permanent
Acrylic Solvent Adhesive




Widths up to 54 in



3 YEARS DURABILITY
INTERIOR & EXTERIOR

EVERYDAY SIGNAGE AND GRAPHICS

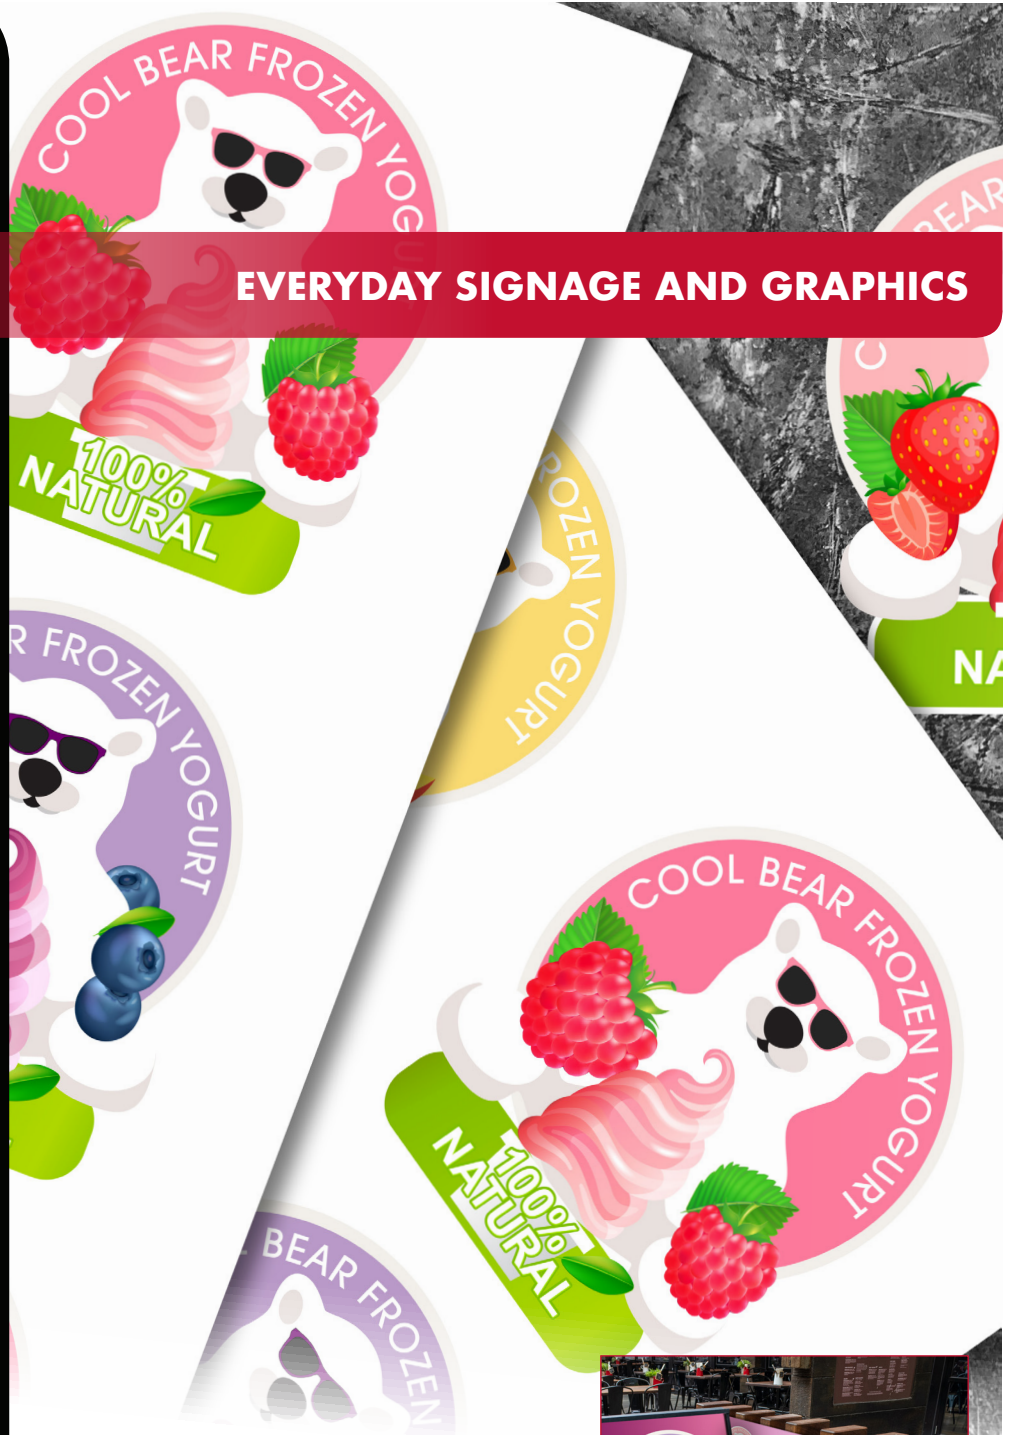

APPLICATIONS

GENERAL SIGNAGE

WINDOW GRAPHICS

EXHIBITION GRAPHICS

POS DISPLAY



DRYTAC®

ADHESIVE SCIENCE

www.drytac.com

CTac™ 80

White PB

TECHNICAL SPECIFICATION

CTac™ 80 White PB films are 3.2 mil (80µ) gloss or matte white monomeric PVC films, coated on one side with a permanent pressure sensitive gray solvent acrylic adhesive that is protected by a 140gsm 2 side PE coated release liner. Suitable for interior and exterior use (up to 3 years).

CTMPB - CTac 80 White Matte PB

White Matte Film with Permanent Gray Adhesive

CTGPB - CTac 80 White Gloss PB

White Gloss Film with Permanent Gray Adhesive

- IDEAL FOR GENERAL SIGNAGE & GRAPHIC PROMOTIONS
- SUITABLE FOR INTERIOR AND EXTERIOR USE
- CAN BE APPLIED TO MANY SMOOTH SURFACES

INSTALLATION

RECOMMENDATION

The surface must be clean and smooth and free of defects before application.

For more information, performance and warranty guidelines please contact your local Drytac office.

© 2025 Drytac Corporation. E&OE. All other trademarks are the property of their respective owners.

PRODUCT STRUCTURE

Film	White Gloss or Matte Monomeric PVC
Adhesive	Gray Permanent Solvent Acrylic (Pressure Sensitive)
Release Liner	140 gsm 2 Side PE Coated, 1 Side Siliconized White Kraft

PRODUCT CHARACTERISTIC

Film Thickness	3.2 mil (80µ)	4.2 mil (105µ)
Adhesive Layer	1 mil (25µ)	
Outdoor Durability	3 Years	
Application Temperature	>41°F (5°C)	
Service Temperature Range	-4°F to 149°F (-20°C to 65°C)	
Shelf Life	2 years	
Storage Conditions	59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity	

OVERLAMINATE RECOMMENDATIONS

When using CTac™, an overlaminate can be used for maximum life expectancy. Products recommended for use with CTac™ are Drytac's Dynamic™ Plus, Interlam™ Pro or Protac™ overlaminates.

DRYTAC[®]
ADHESIVE SCIENCE

Europe

Filwood Road,
Fishponds,
Bristol, BS16 3RY,
United Kingdom
bristol@drytac.com
Tel: +44 (0) 117 958 6500

Canada

30 Driver Road,
Brampton,
Ontario, L6T 5V2,
Canada
toronto@drytac.com
Tel: +1 800.353.2883

USA

5401-B Eubank Road
Sandston,
Virginia, 23150,
USA
customerservice@drytac.com
Tel: +1 800.280.6013